


## LED high bay lighting

LED high bay lights series	Power and lumen	Dimension	LED type and weight
SLED 5L 30W	30W 4500M	Ø 200*H50 mm	COB/3030 2.75kg
SLED 5L 60W	60W 5400LM	Ø 200*H50 mm	COB/3030 2.95kg
SLED 5L 80W	80W 7200LM	Ø 200*H60 mm	COB/3030 3.6kg
SLED 5L 100W	100W 9000LM	Ø 200*H100 mm	COB/3030 4.1kg
SLED 5L 120W	3x40W 10800LM	Ø 200*H120 mm	COB/3030 4.8kg
SLED 5L 150W	3x50W 13500LM	Ø 200*H150 mm	COB/3030 5.4kg
SLED 5L 180W	3x60W 16200LM	Ø 200*H180 mm	COB/3030 6.7kg
SLED 5L 200W	4x50W 18000LM	Ø 200*H200 mm	COB/3030 7.4kg



## 1. COB SensLights

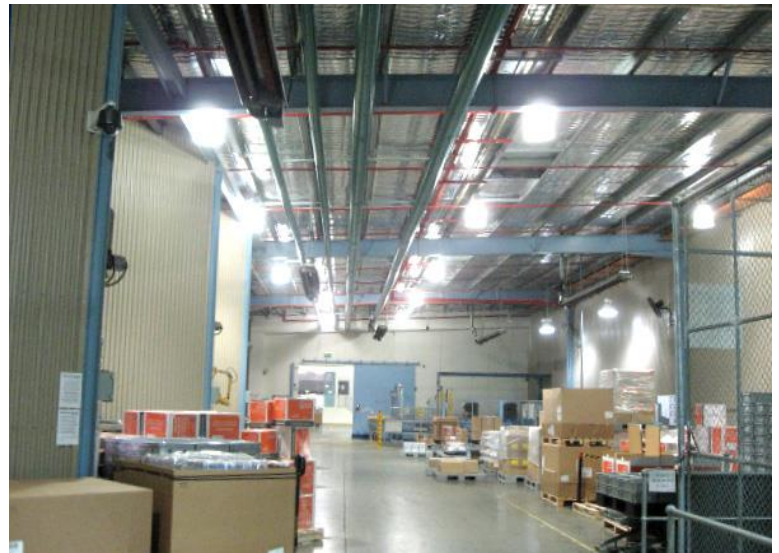


LED high bay light CL 4 with COB encapsulated in PC lens for secondary optical lighting and SensLights with satisfied photosynthetic efficiency and brightness makes the light transmittance as high as 95% so that the LED high bay lights without glare is known as limited light attenuation.

## 2. Unique integral stretched aluminum



The SensLights high bay is made of integral stretched aluminum with fin attached and stretched, the LED high bay light with 50~120w can be packed with radiator and without aluminum plate for the significantly savement in material and costt3. Stainless steel hook

## LED high bay lighting

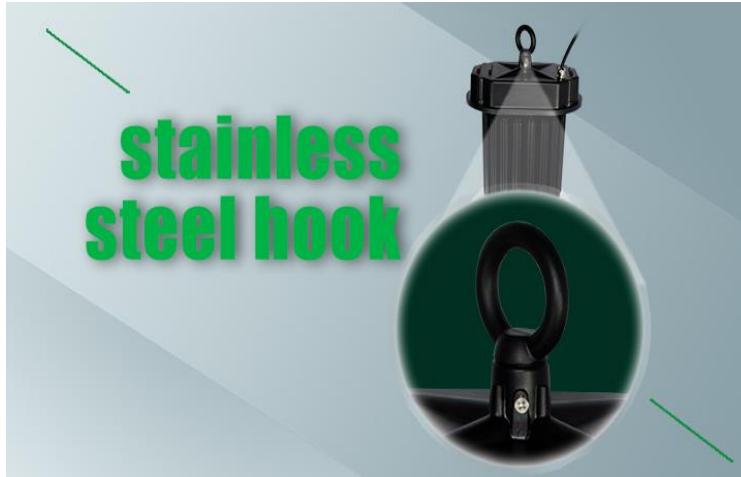

LED high bay light equipped with thickening stainless steel hook hoisting famous for more durable and disassembly; so for the LED SensLights high bay enjoying a great popularity in warehouses, exhibition halls, car parks, art exhibition hall, gymnasium, workshop, highway toll stations, gas stations, supermarkets and other indoor high-altitude area.

### 4. Quality power supply



The SensLights high bay with quality power supply driven by constant current attribute to the wide voltage input, intelligent IC in favor of no surge and smart switch automatic overload protection, certified by Multitasking Corporation

### Files share:

File about certification for LED high bay light and all the SensLights high bay COB's Electronic and Optic Specification and Temperature Test and how to install shared in **Support and Download**



## LED high bay lighting



LED high bay lights series	power and lumen	Dimension	LED type and weight
SLED 5L 30W	30W 4500LM	∅ 200*H50mm	COB/3030 2.75kg
SLED 5L 60W	60W 5400LM	∅ 200*H50mm	COB/3030 2.95kg
SLED 5L 80W	80W 7200LM	∅ 200*H60mm	COB/3030 3.6kg
SLED 5L 100W	100W 9000LM	∅ 200*H100mm	COB/3030 4.1kg
SLED 5L 120W	3×40W 10800LM	∅ 200*H120mm	COB/3030 4.8kg
SLED 5L 150W	3×50W 13500LM	∅ 200*H150mm	COB/3030 5.4kg
SLED 5L 180W	3×60W 16200LM	∅ 200*H180mm	COB/3030 6.7kg
SLED 5L 200W	4×50W 18000LM	∅ 200*H200mm	COB/3030 7.4kg

